

# Industrial Borescope Camera

## Model: S10



# Specification

Pixels: 2MP

5.0 inch IPS HD display, 1080P HD present the real situation

Image Resolution: 1920\*1080, 1280\*720,

Video resolution: 1920\*1080, 1280\*720, 640\*480

Camera: Dual lens, Single lens

Camera diameter: 6mm, 8mm

Camera waterproof rating: IP67

Tube: Snake tube

Tube length: 1m, 2m

Storage hard case


Feature: High density tungsten wire material, 360° ergonomic designs structure with good durability and corrosion resistance.

Equipped with temperature sensor (80° Automatic shut -down)

Anti-slip silicone coated roller, precise and smooth control of camera direction.



# Wide Application

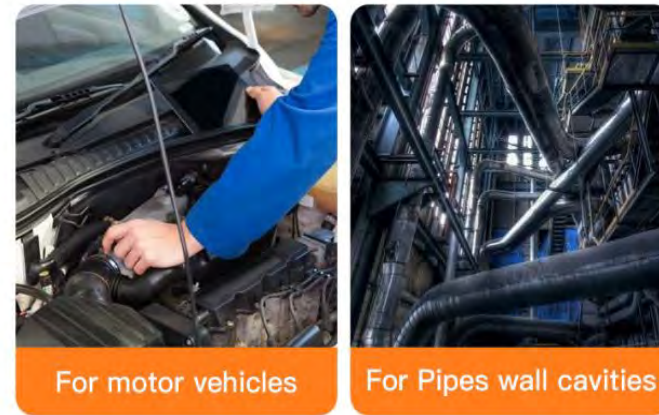

360° two-way rotation  
for wide angle



360° steering in two directions

360° two-way rotation for wide angle  
with dual lens, multifunctional  
articulating borescope

High density tungsten wire material






Equipped with temperature sensor(80° Automatic shut -down)

IP67 waterproof



Equipped with temperature sensor

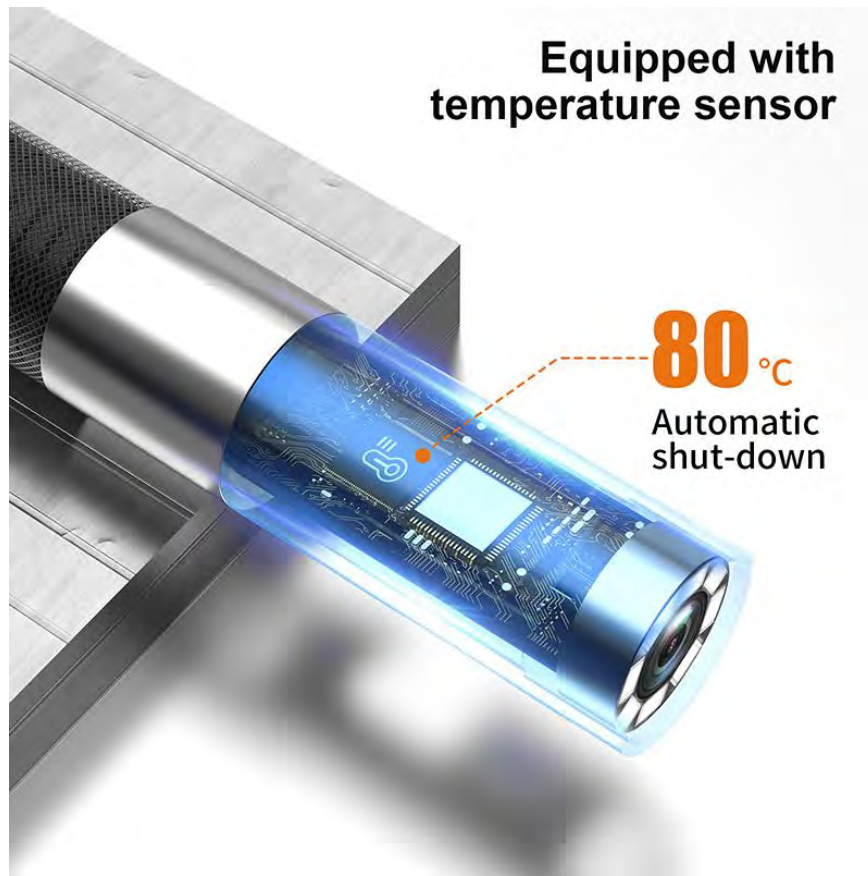

80°C  
Automatic shut-down

5.0 inch IPS display



ANESOK

Multifunctional  
Articulating Borescope

- 360° rotation
- 2.0 megapixels
- 8mm dual camera





## Coated Roller

Anti-slip silicone coated roller, precise and smooth control of camera direction



Two-way easy to bending 180°  
and combine with dual lens

Full HD real view can see more



## Camera advantages

Apply for different places such as in pipes, wall cavities, industrial inspection, equipment repair and motor vehicles to be visually inspected. Intuitive rotation of the base unit provides the user with easy spatial orientation.

Image resolution: 1920\*1080, 1280\*720, 640\*480( JPG format)

Video resolution: 1920\*1080, 1280\*720, 640\*480 (AVI format)



Screen type display	5" TFT OLED
Optimal viewing distance	1" to 14" (25cm to 35.6cm) with 8.0 mm diameter imager head 3/8" to 12" (0.95cm to 30cm) with 5.5mm diameter imager head
Image resolution	1920*1080, 1280*720, 640*480( JPG format)
Video resolution	1920*1080, 1280*720, 640*480 (AVI format)
Power supply	5V 1A USB rechargeable cable
Tested battery life	hours of continuous use
Battery capacity:	2000mAh
Recording medium	Micro SD card ( Micro SD card is optional and not included)
Imager head	8.0mm is standard and 6mm is optional
Operating temperature	Main unit: 32°F to 113°F (0°C to 45°C) cable: 14°F to 176°F (-10° to 80°C)
Storage temperature	-4°F to 158°F (-20°C to 70°C)
Package	EVA Case

## Feature:

Record and play back high resolution still images and videos ( 1920\*1080 )

Single lens, Dual lens camera

5.0inch IPS HD display,1080P HD present the real situation

Built-in & adjustable LED illuminates viewing area

Semi-rigid cable with a good durability

High density tungsten wire material,360° ergonomic designs structure with good durability and corrosion resistance.

Equipped with temperature sensor(80° Automatic shut -down)

Digital zoom for detailed viewing

Built-in rechargeable Li-ion battery capacity 2000mAh

Single button for quick photo and video recording

Dual cameras see straight ahead or at a 90°angle

## Feature:

1m/2m Semi rigid cable

On-screen horizontal/vertical reverse

Mini USB connector for uploading images and videos

1 m long semi-rigid flexible watertight shaft (1m-7m)

Smaller probe for more test purpose like spark plug (6mm/ 8.0mm)

Oil and scratch resistant tempered glass lens

Ergonomic and durable tool housing

Multilingual support

Water Resistant Camera head

Reference images show normal and failed components

Patented detachable lens for easy replacement of worn camera head

 **THANKS** 