

## VS-P39 FHD touch industrial endoscope specification



Professional industrial endoscope solution supplier

To be as your wish

## More efficient detection

VS-P series adopts advanced high-definition touch screen display, with advanced technology , and comprehensive functions , which assists the inspectors to complete the inspection work efficiently.



6 " FHD Touch screen

0.95-8mm  
Various probe diameters are available



More probes for optional



Quick to change probes



Optical fiber illumination for clearer images



WIFI wireless transmission






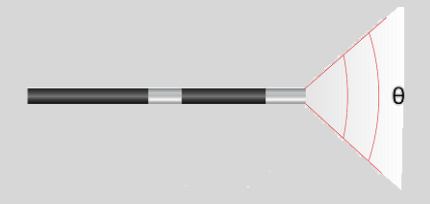
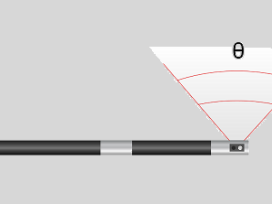
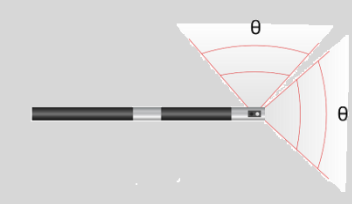
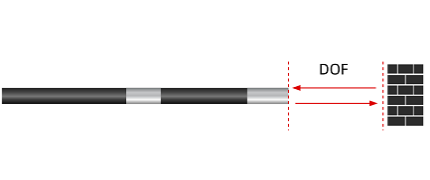
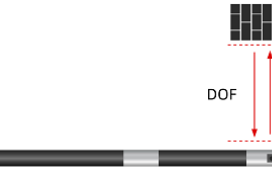
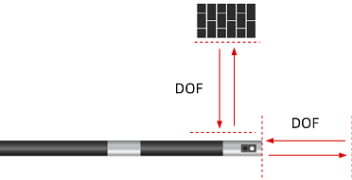


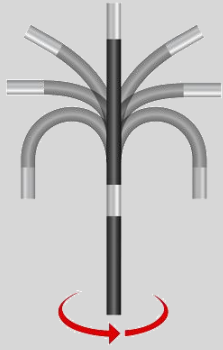

Dual circuit design, single battery can also work

Host	Size	375×175×78mm
	Display	6 " FHD Touch control screen
	Resolution	1920X1080
	Output port	TF card, HDMI port, Type-C, Headphone jack
	Memory card	Built in storage,support TF card,max128G
	Power	≧8 hours of battery life, dual circuit design, single cell battery can also be turned on and work (supports battery replacement without shutting down)
	IP grade	IP54
	Working temperature	-10°C~50°C
	Storage temperature	-20°C~60°C
	Relative humidity	Max 90%, no condensation
System	Operation method	Dual operation of high-definition touch and button navigation, dual camera and video button
	Support function	Freezing, zooming, photographing, flipping, video playback, Analog ruler, Camera adjustment, Watermark
	File format	Image JPEG (JPG) format, Video AVI format
	Language	Chinese, English, German, French, Russian, Spanish, Italian, Polish, Japanese, Ukrainian, and other languages
Packing Case	Weight	3.9kg
	L*M*H	47.9*38.7*15.5cm












## Camera and Probe

There are several length and diameter for VS-P39 series for you to chose according to your requirement.

Model		VS-P39					
		VS-P3910	VS-P3920	VS-P3930	VS-P3940	VS-P3950	VS-P3960
Lens	Direction	Direct view/Side view/Dual view (Dual view synchronous display)					
	View angle( $\theta$ )	120°					
	DOF	8mm~150mm					
	Pixel	1MP					
	Illuminating system	Rear high-power LED fiber optic transmission					
Probe	Length(L)	Direct view/Side view: 12±0.5mm					
		Dual view: 19±0.5mm					
	Diameter(D)	3.9mm					
	Articulating	360° articulation					
	Bending Angle( $\alpha$ )	170°±10°	150°±10°	130°±10°	110°±10°	90°±10°	60°±10°
	IP grade	IP67					
	Working temperature	-20℃~70℃					
Insert tube	Length	1m	2m	3m	4m	5m	6m
		Double view: 3m					
	Material	Flexible (tungsten braided tube)					

	VS-P (Direct View)	VS-PC (Side view)	VS-PS (Double view)
Lens direction			
View angle( $\theta$ )			
DOF			
Probe Length(L)			
Probe diameter(D)			
360° articulation			
Bending angle( $\alpha$ )			

## Packing list

No	Name	PCS	Unit	Photos
1	Host	1	pcs	
2	18650 battery	4	pcs	
3	Packing case	1	pcs	
4	Memory card	1	pcs	
5	Card reader	1	pcs	
6	Tripod	1	pcs	
7	Data line	1	pcs	
8	HDMI cable	1	pcs	
9	Charger	1	pcs	
10	Warranty card	1	pcs	 <p style="text-align: center; font-size: small;">WARRANTY CARD</p>
11	User manual	1	pcs	 <p style="text-align: center; font-size: x-small;">Warning: Please read the instruction manual before use.</p>
12	Guarantee Card	1	pcs	